



**SIDDARTHA INSTITUTE OF SCIENCE AND TECHNOLOGY:: PUTTUR
(AUTONOMOUS)**

Siddharth Nagar, Narayanavanam Road – 517583

QUESTION BANK (DESCRIPTIVE)

Subject with Code :Control Systems (18EE0211) **Course & Branch:** B.Tech– EEE&ECE

Year &Sem: III-B.Tech& I-Sem


Regulation: R18

UNIT –I


CONTROL SYSTEMS CONCEPTS

Q.1 For the mechanical system shown in Fig, determine the transfer [L3,CO1] 10M


functions $\frac{X_1(s)}{F(s)}$ & $\frac{X_2(s)}{F(s)}$

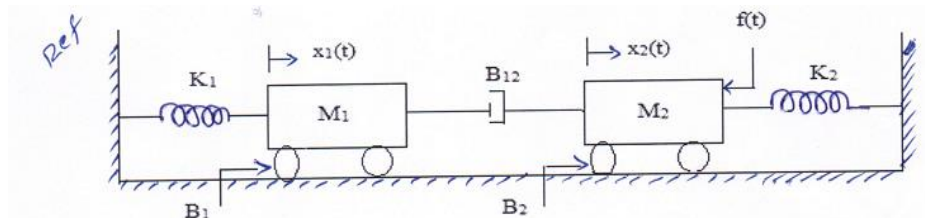

Q.2 Write the differential equations governing the mechanical rotational system [L3,CO1] 10M shown in the figure and find transfer function.

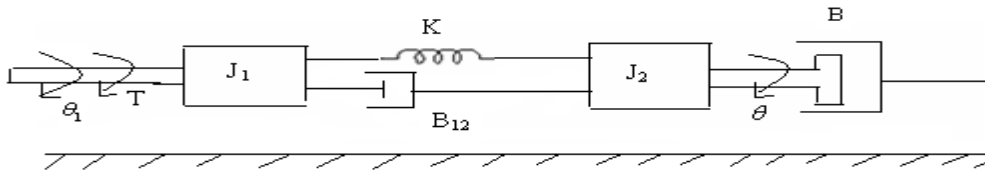


Q.3 For the mechanical system shown in the figure draw the force-voltage and [L6,CO1] 10M force-current analogous circuits.

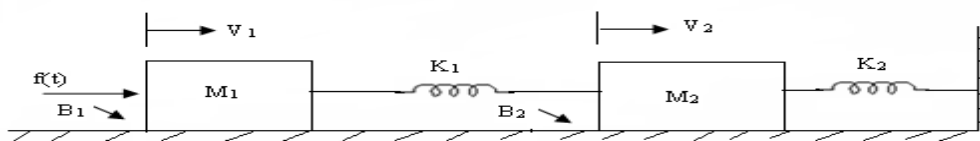


- Q.4**
- Compare open loop and closed loop control systems based on different [L2,CO1] 6M aspects?
 - Distinguish between Block diagram Reduction Technique and Signal Flow [L2,CO1] 4M Graph?


- Q.5** Using Block diagram reduction technique find the Transfer Function of the system. [L5,CO1] 10M

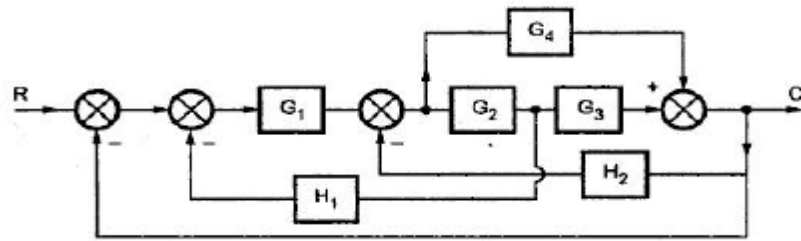


- Q.6** a. Give the block diagram reduction rules to find the transfer function of the system. [L2,CO1] 8M
b. List the properties of signal flow graph. [L1,CO1] 4M
- Q.7** For the system represented in the given figure, determine transfer function $C(S)/R(S)$. [L3,CO1] 10M

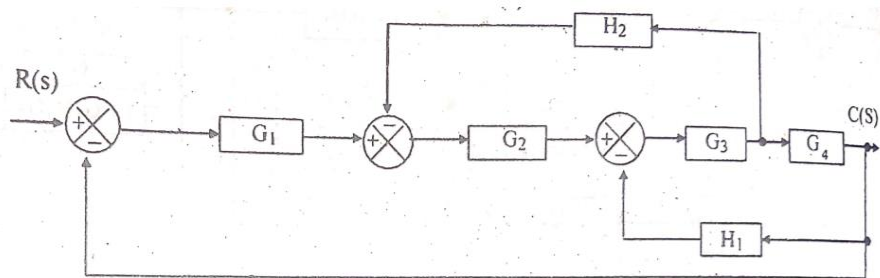


- Q.8** Find the overall transfer function of the system whose signal flow graph is shown below. [L5,CO1] 10M

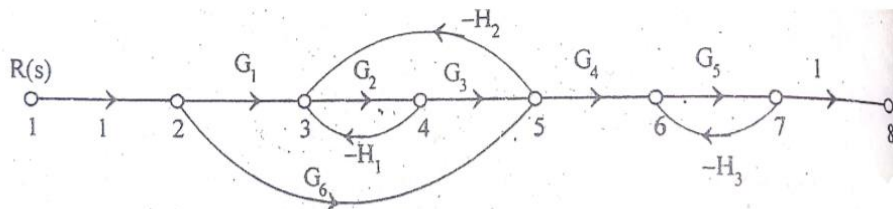

- Q.9** Obtain the transfer function of the system whose signal flow graph is shown below. [L3,CO1] 10M

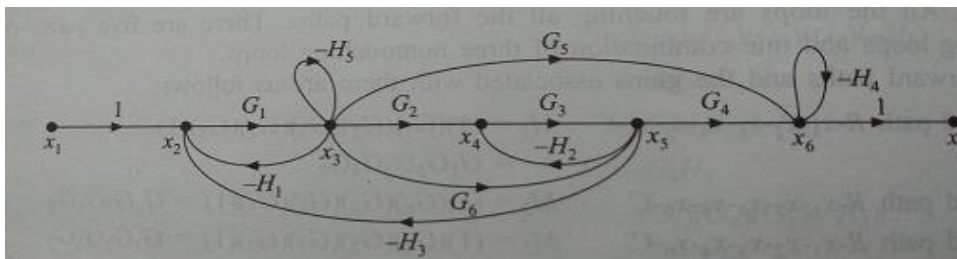

- Q.10** Using mason gain formula find the transfer function $\frac{C}{R}$ for the signal flow graph shown in figure. [L3,CO1] 10M

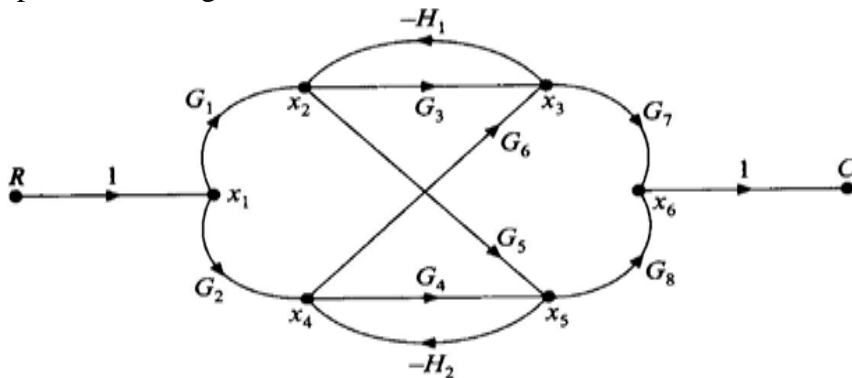

- Q.11**
- i) Define control systems? [L1,CO1] 2M
 - ii) What is feedback? What type of feedback is employed in control systems? [L2,CO1] 2M
 - iii) Define transfer function? [L1,CO1] 2M
 - iv) What is block diagram? What are the basic components of block diagram? [L2,CO1] 2M
 - v) Explain transmittance [L4,CO1] 2M

UNIT-II


TIME RESPONSE ANALYSIS

- Q.1** List out the time domain specifications and derive the expressions for Rise time, Peak time and Peak overshoot. [L1,CO2] 10M
- Q.2** Find all the time domain specifications for a unity feedback control system whose open loop transfer function is given by $G(S) = \frac{25}{s(s+5)}$. [L2,CO2] 10M
- Q.3** A closed loop servo is represented by the differential equation: $\frac{d^2c}{dt^2} + 8\frac{dc}{dt} =$ [L3,CO2] 10M
- 64e.** Where 'c' is the displacement of the output shaft, 'r' is the displacement of the input shaft and $e = r - c$. Determine undamped natural frequency, damping ratio and percentage maximum overshoot for unit step input.

- Q.4** a. Measurements conducted on a servo mechanism, show the system response [L3,CO2] 5M
to be $c(t) = 1 + 0.2e^{-60t} - 1.2e^{-10t}$ When subject to a unit step input. Obtain an
expression for closed loop transfer function, determine the undamped natural
frequency, damping ratio?
- b. For servo mechanisms with open loop transfer function given below what [L3,CO2] 5M
type of input signal give rise to a constant steady state error and calculate
their values.

$$G(s)H(s) = \frac{10}{s^2(s+1)(s+2)}$$

- Q.5** A unity feedback control system has an open loop transfer function, $G(s) =$ [L5,CO2] 10M
 $\frac{10}{s(s+2)}$. Find the rise time, percentage overshoot, peak time and settling time
for a step input of 12 units.
- Q.6** Define steady state error? Derive the static error components for Type 0, [L1,CO2] 10M
Type 1 & Type 2 systems?
- Q.7** A positional control system with velocity feedback shown in figure. What is [L3,CO2] 10M
the response $c(t)$ to the unit step input. Given that damping ratio=0.5. Also
determine rise time, peak time, maximum overshoot and settling time.

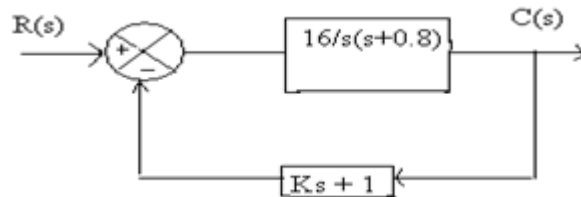

- Q.8** a. A For servo mechanisms with open loop transfer function given below what [L3,CO2] 5M
type of input signal give rise to a constant steady state error and calculate
their values.

$$G(s)H(s) = \frac{20(s+2)}{s(s+1)(s+3)}$$

- b. Consider a unity feedback system with a closed loop transfer function $\frac{C(s)}{R(s)} =$ [L3,CO2] 5M
 $\frac{Ks+b}{(s^2+as+b)}$. Calculate open loop transfer function $G(s)$. Show that steady state
error with unit ramp
input is given by $\frac{(a-K)}{b}$

- Q.9** For a unity feedback control system the open loop transfer function [L3,CO2] 10M
 $G(S) = \frac{10(s+2)}{s^2(s+1)}$.
(i) Determine the position, velocity and acceleration error constants.

(ii) The steady state error when the input is $R(S) = \frac{3}{s} - \frac{2}{s^2} + \frac{1}{3s^3}$.

- Q.10** a. What is the characteristic equation? List the significance of characteristic equation. [L1,CO2] 2M
- b. The system has $G(s) = \frac{K}{s(1+sT)}$ with unity feedback where K & T are constant. [L3,CO2] 8M
Determine the factor by which gain 'K' should be multiplied to reduce the overshoot from **75%** to **25%**?
- Q.11** i) How the system is classified depending on the value of damping ratio? [L4,CO2] 2M
- ii) List the time domain specifications? [L1,CO2] 2M
- iii) Define peak overshoot? [L1,CO2] 2M
- iv) Define accelerating error constant? [L1,CO2] 2M
- v) What is the need for a controller? [L2,CO2] 2M

UNIT –III

STABILITY ANALYSIS IN CONTROL SYSTEMS

- Q.1** With the help of Routh's stability criterion find the stability of the following systems represented by the characteristic equations: [L5,CO3] 10M
- (a) $s^4 + 8s^3 + 18s^2 + 16s + 5 = 0$.
- (b) $s^6 + 2s^5 + 8s^4 + 12s^3 + 20s^2 + 16s + 16 = 0$.
- Q.2** With the help of Routh's stability criterion find the stability of the following systems represented by the characteristic equations: [L5,CO3] 10M
- (a) $s^5 + s^4 + 2s^3 + 2s^2 + 3s + 5 = 0$
- (b) $9s^5 - 20s^4 + 10s^3 - s^2 - 9s - 10 = 0$
- Q.3** The open loop Transfer function of a unity feedback control system is given by $G(s)H(s) = \frac{K}{(s+2)(s+4)(s^2+6s+25)}$ Determine the value of K which will cause sustained oscillations in the closed loop system and what is the corresponding oscillation Frequency. [L3,CO3] 10M

- Q.4** Determine the range of K for stability of unity feedback system whose open loop transfer function is $G(s) H(s) = \frac{K}{s(s+1)(s+2)}$ using Routh's stability criterion. [L3,CO3] 10M
- Q.5** Explain the procedure for constructing root locus. [L2,CO3] 10M
- Q.6** Sketch the root locus of the system whose open loop transfer function is $G(s) H(s) = \frac{K}{s(s+2)(s+4)}$. [L3,CO3] 10M
- Q.7** Sketch the root locus of the system whose open loop transfer function is $G(s) H(s) = \frac{K}{s(s^2+4s+13)}$ [L3,CO3] 10M
- Q.8** Sketch the root locus of the system whose open loop transfer function is $G(s) H(s) = \frac{K(s+9)}{s(s^2+4s+11)}$ [L3,CO3] 10M
- Q.9** Sketch the root locus of the system whose open loop transfer function is $G(s) H(s) = \frac{K(s^2+6s+25)}{s(s+1)(s+2)}$ [L3,CO3] 10M
- Q.10** Sketch the root locus of the system whose open loop transfer function is $G(s)H(s) = \frac{K}{s(s^2+6s+10)}$ [L3,CO3] 10M
- Q.11** i) Explain BIBO stability? [L12,CO3] 2M
 ii) What is the necessary condition for stability? [L2,CO3] 2M
 iii) Define root locus? [L1,CO3] 2M
 iv) What is centroid? How the centroid is calculated? [L2,CO3] 2M
 v) What is limitedly stable system? [L2,CO3] 2M

UNIT-IV

FREQUENCY RESPONSE ANALYSIS

- Q.1** Sketch the Bode plot for the following transfer function $G(s)H(s) = \frac{K e^{-0.1s}}{s(s+1)(1+0.1s)}$ [L3,CO4] 10M
- Q.2** Sketch the Bode plot for the system having the following transfer function [L3,CO4] 10M

$$G(s) = \frac{15(s+5)}{s(s^2 + 16s + 100)}$$

- Q.3** a. Define and derive the expression for resonant frequency. [L1,CO4] 5M
- b. Draw the magnitude bode plot for the system having the following transfer function: [L3,CO4] 5M
- $$G(s) H(s) = \frac{2000(s+1)}{s(s+10)(s+40)}$$
- Q.4** Derive the expressions for resonant peak and resonant frequency and hence establish the correlation between time response and frequency response. [L3,CO4] 10M
- Q.5** Draw the Bode plot for the following Transfer Function $G(s) H(s) = \frac{20(0.1s+1)}{s^2(0.2s+1)(0.02s+1)}$ [L3,CO4] 10M
- From the bode plot determine (a) Gain Margin (b) Phase Margin (c) Comment on the stability
- Q.6** a. Given $\xi = 0.7$ and $\omega_n = 10$ rad/sec. Calculate resonant peak, resonant frequency and bandwidth. [L3,CO4] 5M
- b. Sketch the polar plot for the open loop transfer function of a unity feedback system is given by $G(s) = \frac{1}{s(1+s)(1+2s)}$. Determine Gain Margin & Phase Margin. [L3,CO4] 5M
- Q.7** A system is given by $G(s) H(s) = \frac{(4s+1)}{s^2(s+1)(2s+1)}$ Sketch the nyquist plot and determine the stability of the system. [L3,CO4] 10M
- Q.8** Draw the Nyquist plot for the system whose open loop transfer function is, $G(s)H(s) = \frac{K}{s(s+2)(s+10)}$. Determine the range of K for which closed loop system is stable. [L3,CO4] 10M
- Q.9** Obtain the transfer function of Lead Compensator, draw pole-zero plot and write the procedure for design of Lead Compensator using Bode plot. [L3,CO4] 10M
- Q.10** Obtain the transfer function of Lag Compensator, draw pole-zero plot and write the procedure for design of Lag Compensator using Bode plot. [L3,CO4] 10M
- Q.11** i) Define phase margin ? [L1,CO4] 2M
- ii) Write the expression for resonant peak and resonant frequency? [L3,CO4] 2M
- iii) What is phase and gain cross over frequency? [L2,CO4] 2M
- iv) What are the frequency domain specifications? [L2,CO4] 2M
- v) What is frequency response? [L2,CO4] 2M

UNIT-V
STATE SPACE ANALYSIS

- Q.1** Determine the Solution for Homogeneous and Non homogeneous State equations [L3,CO5] 10M
- Q.2** For the state equation: $\dot{X} = \begin{pmatrix} 0 & 1 \\ -2 & -3 \end{pmatrix} X + \begin{pmatrix} 0 \\ 1 \end{pmatrix} U$ with the unit step input and the initial conditions are $X(0) = \begin{pmatrix} 1 \\ 1 \end{pmatrix}$. Solve the following (a) State transition matrix [L3,CO5] 10M
(b) Solution of the state equation.
- Q.3** A system is characterized by the following state space equations: [L3,CO5]
 $\dot{X}_1 = -3x_1 + x_2$; $\dot{X}_2 = -2x_1 + u$; $Y = x_1$
 (a) Find the transfer function of the system and Stability of the system. 5M
 (b) Compute the STM 5M
- Q.4** a. State the properties of State Transition Matrix. [L1,CO5] 5M
 b. Diagonalize the following system matrix $A = \begin{pmatrix} 0 & 6 & -5 \\ 1 & 0 & 2 \\ 3 & 2 & 4 \end{pmatrix}$ [L3,CO5] 5M
- Q.5** a. Find state variable representation of an armature controlled D.C.motor. [L2,CO5] 5M
 b. A state model of a system is given as: [L3,CO5] 5M
 $\dot{X} = \begin{pmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{pmatrix} X + \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} U$ and $Y = (1 \ 0 \ 0)X$
 Determine: (i) The Eigen Values. (ii) The State Transition Matrix.
- Q.6** a. Derive the expression for the transfer function and poles of the system [L3,CO5] 5M
 from the state model. $\dot{X} = Ax + Bu$ and $y = Cx + Du$
 b. Diagonalize the following system matrix $A = \begin{pmatrix} 4 & 1 & -2 \\ 1 & 0 & 2 \\ 1 & -1 & 3 \end{pmatrix}$ [L3,CO5] 5M
- Q.7** Obtain a state model for the system whose Transfer function is given by [L2,CO5] 10M

$$G(s) H(s) = \frac{(7s^2 + 12s + 8)}{(s^3 + 6s^2 + 11s + 9)}$$
- Q.8** a. State the properties of STM. [L1,CO5] 3M

[L2,CO5] 7M

- b. For the state equation: $\dot{\mathbf{X}} = \begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix} \mathbf{X} + \begin{pmatrix} 0 \\ 1 \end{pmatrix} \mathbf{U}$ when, $\mathbf{X}(0) = \begin{pmatrix} 1 \\ 0 \end{pmatrix}$.

Find the solution of the state equation for the unit step input.

Q.9 Find the state model of the differential equation is [L2,CO5] 5M

a.
$$\ddot{y} + 2\ddot{y} + 3\dot{y} + 4y = u$$

[L1,CO5] 5M

- b. Diagonalize the following system matrix $A = \begin{pmatrix} 0 & 1 & 0 \\ 3 & 0 & 2 \\ -12 & -7 & -6 \end{pmatrix}$

Q.10 a. Define state, state variable, state equation. [L1,CO5] 5M

b. Derive the expression for the transfer function from the state model. [L1,CO5] 5M

$$\dot{\mathbf{X}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u} \quad \mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u}$$

Q.11 i) List out the properties of STM? [L1,CO5] 2M

ii) Write the state equation? [L3,CO5] 2M

iii) Define state variable? [L2,CO5] 2M

iv) What is Diagonalize matrix? [L2,CO5] 2M

v) Write the formula for solutions of state equation? [L3,CO5] 2M

Prepared by: *P. Nandhini*